


Low-Density Front Cable Organizer

REV		SHT		DESCRIPTION		REVISIONS		DATE	ECN	CHECKED
A	ALL	RELEASE	NEW					1/21/02	NEW	RBS




TOP VIEW

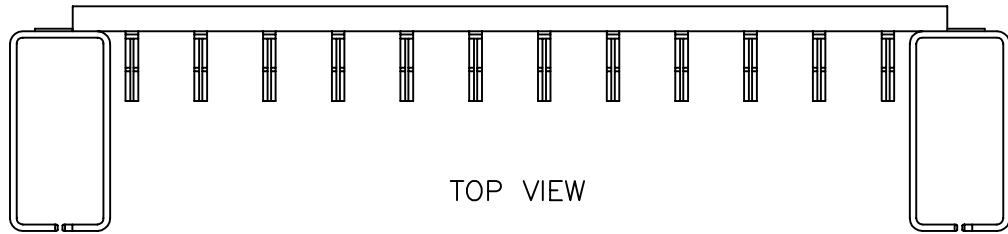


FRONT VIEW

MAXIMUM PATCH CORD
CLIP CABLE CAPACITY




.25" OUTSIDE DIAMETER IS A GOOD
WORST CASE ESTIMATE FOR DETERMINING
4-PAIR CABLE VOLUME REQUIREMENTS.


MAXIMUM RING
CABLE CAPACITY

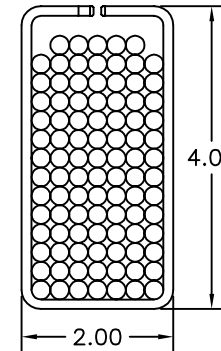

MAXIMUM OPTIMUM OF 96 FOUR-PAIR
CABLES (.25" OD) CAN FIT IN A
STANDARD VERTICAL PATH WHILE
MAINTAINING PROPER ADMINISTRATION
FACILITY.




RIGHT SIDE

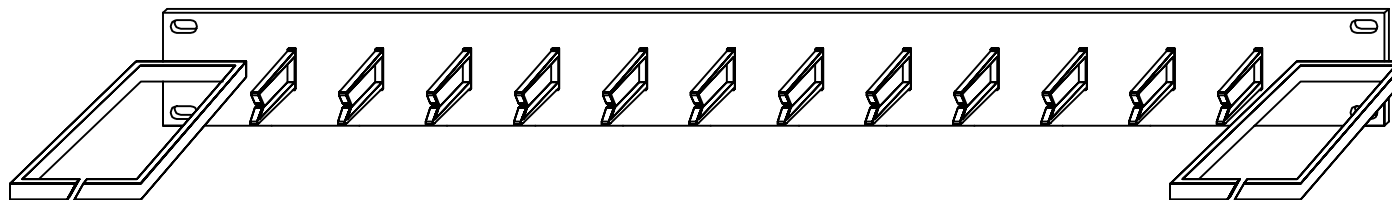

SPECIFICATIONS

FEATURES/MATERIALS:

- ORGANIZER MANAGES UP TO 24 PORTS/CABLES EFFECTIVELY.
- PROVIDES FRONT HORIZONTAL AND VERTICAL CABLE ROUTING CAPABILITIES.
- CABLE ORGANIZER IS STEEL CONSTRUCTION PAINTED BLACK.



UNCONTROLLED COPY				A OCC OPTICAL CABLE CORPORATION		5290 Concourse Drive Roanoke, VA 24019 Phone: 800-822-7711 Fax: 540-265-0724 www.occfiber.com	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS ±1/32" ANGLES ±1/2° 3 PLACE DECIMALS ±.005" 2 PLACE DECIMALS ±.01"		THIS DRAWING AND THE DESIGN SHOWN ARE THE PROPERTY OF OPTICAL CABLE CORPORATION AND MAY NOT BE USED AS THE BASIS FOR MANUFACTURE OR SALE WITHOUT SPECIFIC WRITTEN PERMISSION OF OPTICAL CABLE CORPORATION.		DRAWN BY D.A.HOLBERT DATE 1/21/02		DWG TITLE	
MATERIAL SEE BILL OF MATERIAL		CHECKED BY R.B.SMITH DATE 1/24/02		ENGINEER J.YANIK DATE 1/21/02		CABLE ORGANIZER, 1.75" X 19.00"	
FINISH SEE NOTES		APPROVED H.JOHNSON DATE 3/16/10		PREVIOUS DWG		SIZE C DWG NO. C105087 REV A	
NEXT DWG		FILENAME C105087A.DWG		SCALE NONE		SHEET 1 OF 1	